

Panel C-post, replacing

Note! The illustrations in this service information are used for different model years and/or models. Some variation may occur. However, the essential information in the illustrations is always correct.

Removal

Removing the C-post panel

The panel consists of 3 parts. Remove the upper part first. Then remove the lower part. Finally remove the center part.

Fold down the backrest cushion.




Remove the weatherstrip around the door.

Remove:

- the side cushion. See: [Upholstery, side cushion, replacing](#)
- the upper panel. Pull the panel straight inwards into the vehicle
- the holder clip, x 1.

Pull the lower panel straight inwards into the vehicle. Pry it out of the sill trim panel.

Pull the center panel straight inwards into the vehicle. Fold it out.

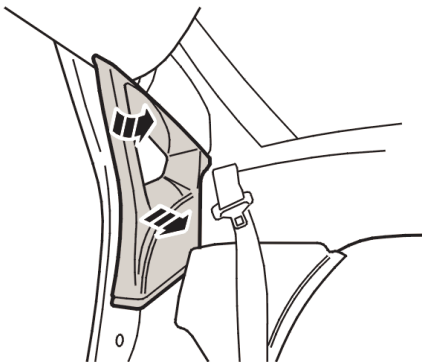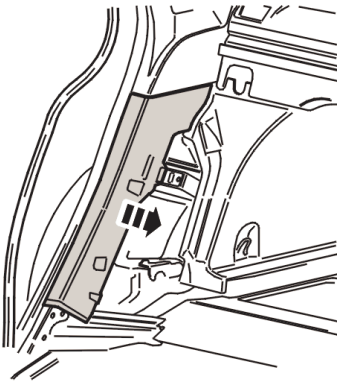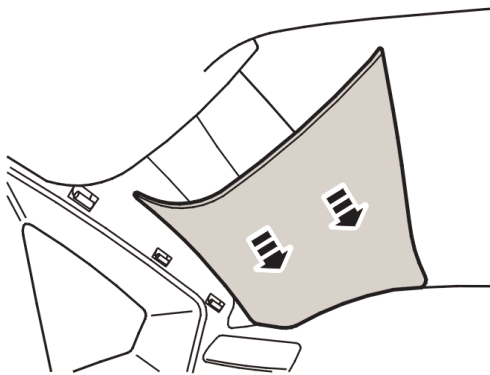

Installation

Installing the C-post panel

Install:

- the center panel. Fold the panel in and press it into place
- the lower panel. Guide the panel into the guide channel against the sill trim panel. Press the panel into place
- the upper panel. Guide the rear edge of the panel and secure the holder clip. Press the panel into place
- the side cushion. See: [Upholstery, side cushion, replacing](#)
- the weatherstrip around the doors.

Fold the backrest cushion back into position.